




mod Solo

Fluorescent

2x 14w	TFL	G5	IM098	TFL214	I	+	198
2x 24w	TFL	G5	IM098	TFL224	I	+	198
40w	PLL	2G11	IM098	PLL040	I	+	199
55w	PLL	2G11	IM098	PLL055	I	+	199




TFL PLL



LG7 Compliant

Plasterboard type ceiling mounting

+ 093 Recessing bezel white



□ Gear types F, G & V must be operated through a Digital Serial Interface (p389)

- D** High frequency
- E** High frequency + Emergency
- Z** High frequency + self test Emergency
- F** High frequency digital dimming
- G** High frequency digital dimming + Emergency
- V** High frequency digital dimming + self test Emergency
- H** High frequency analogue (1-10V) dimming
- I** High frequency analogue (1-10V) dimming + Emergency
- W** High frequency analogue (1-10V) dimming + self test Emergency
- J** High frequency switch dimming
- K** High frequency switch dimming + Emergency
- Y** High frequency switch dimming + self test Emergency
- S** High frequency DALI dimming
- T** High frequency DALI dimming + Emergency
- U** High frequency DALI dimming + self test Emergency
- C** High frequency DALI dimming + DALI Emergency

I - White

+
093 Recessing bezel white

Current and Power Ratings

TFL Lamp	Current (A)	Power (W)
2x 14W	0.14	31.5
2x 24W	0.22	51.0

PLL Lamp	Current (A)	Power (W)
1x 40W	0.22	46.0
1x 55W	0.29	61.0

Recommended Lamps

TFL Type	3000K		4000K	
	Osram	Philips	Osram	Philips
TFL014	FH1483	639387	FH1484	639400
TFL024	FQ2483	639585	FQ2484	639609

PLL Type	3000K		4000K	
	Osram	Philips	Osram	Philips
PLL040	DL4083	610942	DL4084	610973
PLL055	DL5583	615411	DL5584	615428




mod Solo

LG7 Compliant

- Impressive LOR figures - Solo 0.80 TFL, 0.74 PLL
- LG7 compliant, below 1500cd/m² at the 65° cut off
- Polycarbonate refractors engineered for maximum control and performance
- High performance, mark-resistant matt louvre
- Refractor is TP(b) and 850°C glow wire test compliant
- Tool free lamp change and refractor cleaning
- Suitable for 15mm and 25mm T grid ceilings
- Shallow recessing depth of only 105mm
- Maintains flush ceiling appearance (no protrusion below ceiling)
- Interconnection plug in/out wiring systems available as option (p373)
- Energy management and controls consultancy - proj@hacel.co.uk

Product Codes Explained

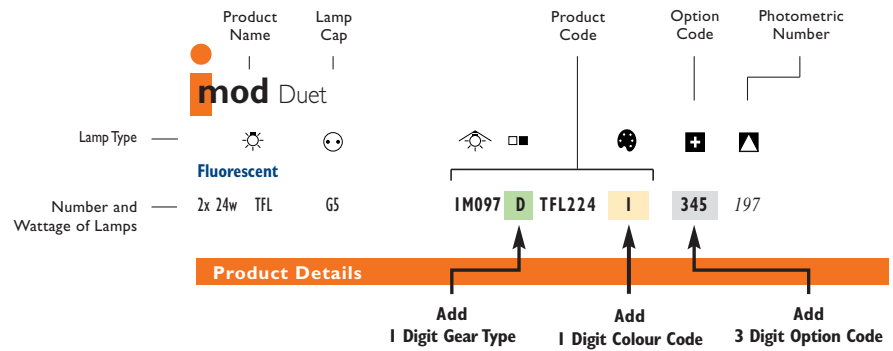

Symbols

	12V
	Voltage & frequency
	Class I / II / III
	Ingress protection
	Suitable for flammable surface
	Plug & socket connections
	Unfused terminal block
	Fused terminal block
	Integral fuse
	Knockout size
	Tilt
	Rotation / pan
	Cut out
	Fixing centres
	Uplighting / Downlighting
	Uplighting / Downlighting
	Pressed metal construction
	Extruded aluminium construction
	Spun construction
	Die cast construction
	Injection moulding
	Minimum distance from lamp
	Decorative glass feature
	Safety glass
	Foot switch
	Supplied complete with plug
	Maximum weight kg
	Operating temperature of fascia
	Tamper proof screws
	Maximum evenly distributed load kg