



Scenaric Daylight

Fluorescent


4x 14w	TFL	G5	IM940	TFL414	I	189
4x 24w	TFL	G5	IM940	TFL424	I	189

Fluorescent & PIR

4x 14w	TFL	G5	IM729	TFL414	I	189
4x 24w	TFL	G5	IM729	TFL424	I	189

240V 50Hz Class I IP 20 F 20mm Max 6.8 kg 7.8 kg D,F,H,J E,G,I,K

TFL

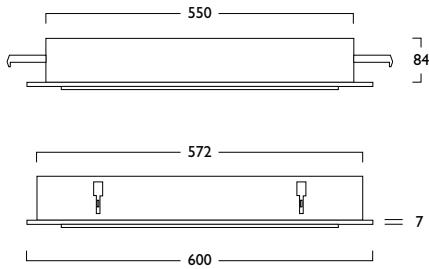

Gear types F, G & V must be operated through a Digital Serial Interface (p389)

- D** High frequency
- E** High frequency + Emergency
- Z** High frequency + self test Emergency
- F** High frequency digital dimming
- G** High frequency digital dimming + Emergency
- V** High frequency digital dimming + self test Emergency
- H** High frequency analogue (1-10V) dimming
- I** High frequency analogue (1-10V) dimming + Emergency
- W** High frequency analogue (1-10V) dimming + self test Emergency
- J** High frequency switch dimming
- K** High frequency switch dimming + Emergency
- Y** High frequency switch dimming + self test Emergency
- S** High frequency DALI dimming
- T** High frequency DALI dimming + Emergency
- U** High frequency DALI dimming + self test Emergency
- C** High frequency DALI dimming + DALI Emergency

I - White

Current and Power Ratings


TFL Lamp	Current (A)	Power (W)
4x 14W	0.30	65.0
4x 24W	0.45	99.0

Recommended Lamps

TFL Type	3000K		4000K	
	Osram	Philips	Osram	Philips
TFL014	FH1483	639387	FH1484	639400
TFL024	FQ2483	639585	FQ2484	639609




Scenaric Daylight

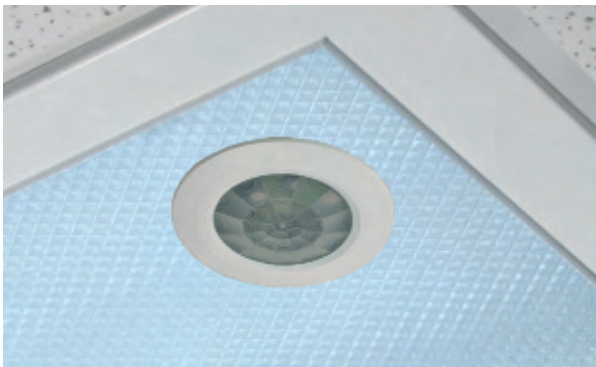

Fluorescent & PIR

The Scenaric Daylight 729 has an inbuilt Passive Infra Red detector which can provide various operating modes to improve energy efficiency. With the correct PIR Control Device the luminaire can be dimmed remotely and programmed for presence detection and daylight linked illumination. The luminaire is suitable for use with digital dimming gear types F, G & V. The PIR includes its own Digital Serial Interface therefore negating the need for an external DSI with the Scenaric IM729.

Product Codes Explained

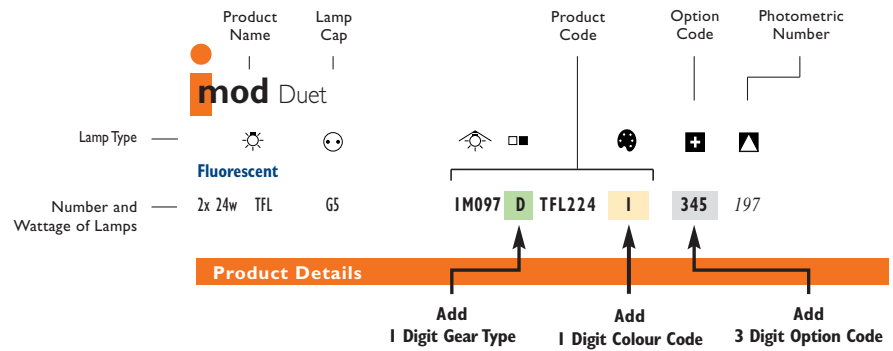

Symbols

	12V
	Voltage & frequency
	Class I / II / III
	Ingress protection
	Suitable for flammable surface
	Plug & socket connections
	Unfused terminal block
	Fused terminal block
	Integral fuse
	Knockout size
	Tilt
	Rotation / pan
	Cut out
	Fixing centres
	Uplighting / Downlighting
	Uplighting / Downlighting
	Pressed metal construction
	Extruded aluminium construction
	Spun construction
	Die cast construction
	Injection moulding
	Minimum distance from lamp
	Decorative glass feature
	Safety glass
	Foot switch
	Supplied complete with plug
	Maximum weight kg
	Operating temperature of fascia
	Tamper proof screws
	Maximum evenly distributed load kg