


## Wallwasher Long

**Fluorescent**

54w	TFL	G5	IM935	TFL054	+	231
2x 54w	TFL	G5	IM935	TFL254	+	232
2x 40w	PLL	2G11	IM935	PLL240	+	233
2x 55w	PLL	2G11	IM935	PLL255	+	233

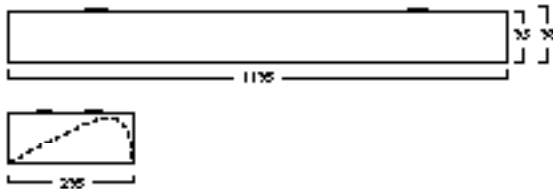

Gear types F, G & V must be operated through a Digital Serial Interface (p389)

- D** High frequency
- E** High frequency + Emergency
- Z** High frequency + self test Emergency
- F** High frequency digital dimming
- G** High frequency digital dimming + Emergency
- V** High frequency digital dimming + self test Emergency
- H** High frequency analogue (1-10V) dimming
- I** High frequency analogue (1-10V) dimming + Emergency
- W** High frequency analogue (1-10V) dimming + self test Emergency
- J** High frequency switch dimming
- K** High frequency switch dimming + Emergency
- Y** High frequency switch dimming + self test Emergency
- S** High frequency DALI dimming
- T** High frequency DALI dimming + Emergency
- U** High frequency DALI dimming + self test Emergency
- C** High frequency DALI dimming + DALI Emergency

I - White 6 - Graphite

- 089** Recessing bezel white (IM936)
- 090** Recessing bezel graphite (IM936)
- 091** Recessing bezel white (IM935)
- 092** Recessing bezel graphite (IM935)

### Current and Power Ratings

TFL	Lamp	Current (A)	Power (W)
<input type="checkbox"/>	1x 54W	0.27	58.0
	2x 54W	0.54	118.0

PLL	Lamp	Current (A)	Power (W)
<input type="checkbox"/>	2x 40W	0.41	88.0
	2x 55W	0.56	120.0

### Recommended Lamps

TFL	3000K		4000K		6500K	
Type	Osram	Philips	Osram	Philips	Osram	Philips
TFL054	FQ5483	643162	FQ5484	643186	FQ54865	643919

PLL	3000K		4000K	
Type	Osram	Philips	Osram	Philips
PLL040	DL4083	610942	DL4084	610973
PLL055	DL5583	615411	DL5584	615428




## Wallwasher Long




089 Recessing bezel



091, 092 Recessing bezel

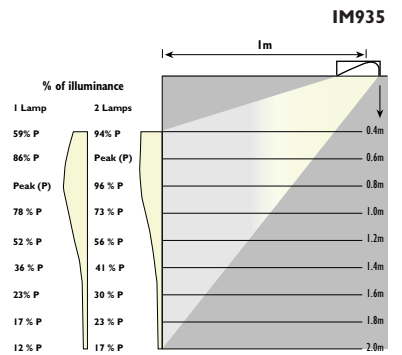

## Product Codes Explained

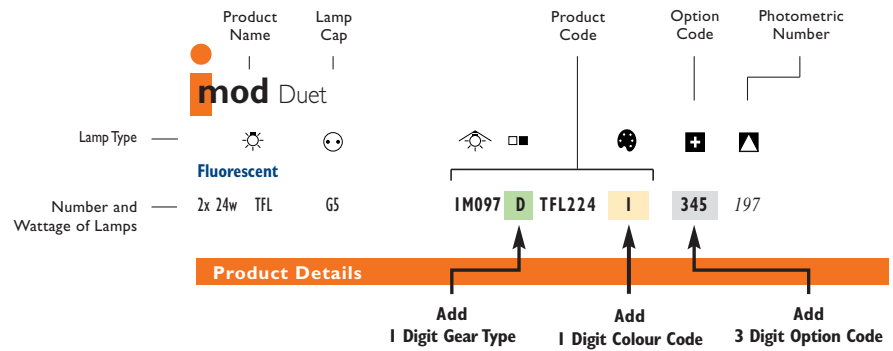

## Symbols

	12V
	Voltage & frequency
	Class I / II / III
	Ingress protection
	Suitable for flammable surface
	Plug & socket connections
	Unfused terminal block
	Fused terminal block
	Integral fuse
	Knockout size
	Tilt
	Rotation / pan
	Cut out
	Fixing centres
	<b>Uplighting</b> / Downlighting
	Uplighting / <b>Downlighting</b>
	Pressed metal construction
	Extruded aluminium construction
	Spun construction
	Die cast construction
	Injection moulding
	Minimum distance from lamp
	Decorative glass feature
	Safety glass
	Foot switch
	Supplied complete with plug
	Maximum weight kg
	Operating temperature of fascia
	Tamper proof screws
	Maximum evenly distributed load kg