



Wallwasher Short

Fluorescent

2x 14w	TFL	G5	IM936	TFL214	+	228
2x 24w	TFL	G5	IM936	TFL224	+	228
40w	PLL	2G11	IM936	PLL040	+	229
55w	PLL	2G11	IM936	PLL055	+	229
2x 40w	PLL	2G11	IM936	PLL240	+	230
2x 55w	PLL	2G11	IM936	PLL255	+	230

240V 50Hz	Class I	IP 20	F	20mm	450 x 150mm	±
Max	D,F,H,J	E,G,I,K				
	4 kg	5 kg				

TFL PLL



Gear types F, G & V must be operated through a Digital Serial Interface (p389)

- D** High frequency
- E** High frequency + Emergency
- Z** High frequency + self test Emergency
- F** High frequency digital dimming
- G** High frequency digital dimming + Emergency
- V** High frequency digital dimming + self test Emergency
- H** High frequency analogue (1-10V) dimming
- I** High frequency analogue (1-10V) dimming + Emergency
- W** High frequency analogue (1-10V) dimming + self test Emergency
- J** High frequency switch dimming
- K** High frequency switch dimming + Emergency
- Y** High frequency switch dimming + self test Emergency
- S** High frequency DALI dimming
- T** High frequency DALI dimming + Emergency
- U** High frequency DALI dimming + self test Emergency
- C** High frequency DALI dimming + DALI Emergency

I - White **6** - Graphite

- 089** Recessing bezel white (IM936)
- 090** Recessing bezel graphite (IM936)
- 091** Recessing bezel white (IM935)
- 092** Recessing bezel graphite (IM935)

Current and Power Ratings

TFL Lamp	Current (A)	Power (W)
2x 14W	0.14	31.5
2x 24W	0.22	51.0

PLL Lamp	Current (A)	Power (W)
1x 40W	0.22	46.0
1x 55W	0.29	61.0
2x 40W	0.41	88.0
2x 55W	0.56	120.0

Recommended Lamps

TFL Type	3000K		4000K	
Type	Osram	Philips	Osram	Philips
TFL014	FH1483	639387	FH1484	639400
TFL024	FQ2483	639585	FQ2484	639609


PLL Type	3000K		4000K	
Type	Osram	Philips	Osram	Philips
PLL040	DL4083	610942	DL4084	610973
PLL055	DL5583	615411	DL5584	615428





Wallwasher Short




089 Recessing bezel



089, 090 Recessing bezel

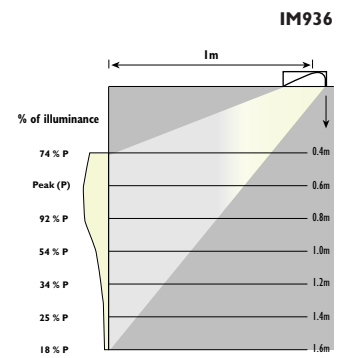

Product Codes Explained

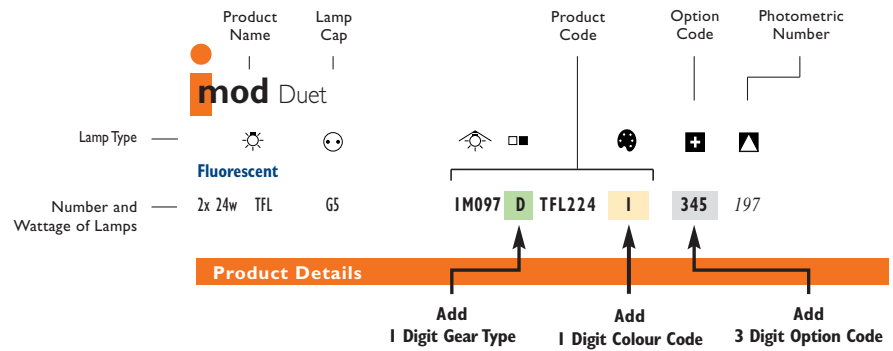

Symbols

	12V
	Voltage & frequency
	Class I / II / III
	Ingress protection
	Suitable for flammable surface
	Plug & socket connections
	Unfused terminal block
	Fused terminal block
	Integral fuse
	Knockout size
	Tilt
	Rotation / pan
	Cut out
	Fixing centres
	Uplighting / Downlighting
	Uplighting / Downlighting
	Pressed metal construction
	Extruded aluminium construction
	Spun construction
	Die cast construction
	Injection moulding
	Minimum distance from lamp
	Decorative glass feature
	Safety glass
	Foot switch
	Supplied complete with plug
	Maximum weight kg
	Operating temperature of fascia
	Tamper proof screws
	Maximum evenly distributed load kg