



Aspen Prismatic




Fluorescent

32w PLT	GX24q-3	PN938	A	PLT032	+	162
42w PLT	GX24q-4	PN938	-	PLT042	+	162
57w PLT	GX24q-5	PN938	-	PLT057	+	163
70w PLT	GX24q-6	PN938	-	PLT070	+	163
60w PLH	2G8-1	PN938	D	PLH060	+	165
85w PLH	2G8-1	PN938	D	PLH085	+	165

Metal Halide

70w MHE	E27	PN938	B	MHE070	+	059
150w MHE	E27	PN938	B	MHE150	+	059
250w MHE	E40	PN938	B	MHE250	+	059
70w MHS	G12	PN938	B	MHS070	+	060
150w MHS	G12	PN938	B	MHS150	+	060

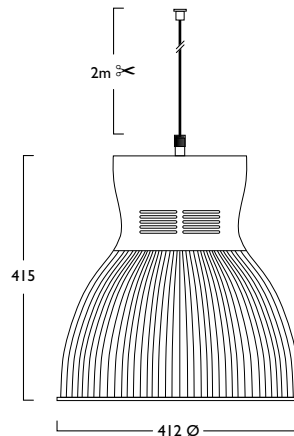

Current and Power Ratings

PLT Lamp	Current (A)	Power (W)
1x 32W	0.16	34.5
1x 42W	0.21	46.0
1x 57W	0.28	60.5
1x 70W	0.35	75.0

MHE Lamp	Current (A)	Power (W)
1x 70W	0.43	81.5
1x 150W	0.80	168.5
1x 250W	1.35	285.5

MHS Lamp	Current (A)	Power (W)
1x 70W	0.43	81.5
1x 150W	0.80	168.5

Recommended Lamps

Type	3000K		4000K	
	Osram	Philips	Osram	Philips
PLT032	DTE323	611284	DTE324	611314
PLT042	DTE423	611345	DTE424	611376
PLT057	GE 45204	611406	GE 45201	611451
PLT070	GE 45208		GE 45218	

Type	Osram	Philips
MHE070	H70EN	---
MHE150	H15EN	---
MHE250	H250EN	181145

Type	3000K		4200K	
	Osram	Philips	Osram	Philips
MHS070	PB70W	196996	PN70N	199270
MHS150	PB150W	197801	PB150N	200051

■ Gear types F & G must be operated through a Digital Serial Interface (p389)

- B** Wire wound
- D** High frequency
- E** High frequency + Emergency (32/42w PLT)
- F** High frequency digital dimming (32/42/57w PLT)
- G** High frequency digital dimming + Emergency (32/42w PLT)
- H** High frequency analogue (1-10V) dimming (all PLT)
- I** High frequency analogue (1-10V) dimming + Emergency (32/42w PLT)
- J** High frequency switch dimming (32/42/57w PLT)
- K** High frequency switch dimming + Emergency (32/42w PLT)
- S** High frequency DALI dimming (32/42/57w PLT)
- T** High frequency DALI dimming + Emergency (32/42w PLT)

● 1 - White 3 - Black 6 - Graphite

- +** Glass
- 309** Safety clear (PLT/PLH)
- 307** 5m Suspension (wire only)

Product Codes Explained



Symbols

	12V
	Voltage & frequency
	Class I / II / III
	Ingress protection
	Suitable for flammable surface
	Plug & socket connections
	Unfused terminal block
	Fused terminal block
	Integral fuse
	Knockout size
	Tilt
	Rotation / pan
	Cut out
	Fixing centres
	Uplighting / Downlighting
	Uplighting / Downlighting
	Pressed metal construction
	Extruded aluminium construction
	Spun construction
	Die cast construction
	Injection moulding
	Minimum distance from lamp
	Decorative glass feature
	Safety glass
	Foot switch
	Supplied complete with plug
	Maximum weight kg
	Operating temperature of fascia
	Tamper proof screws
	Maximum evenly distributed load kg