
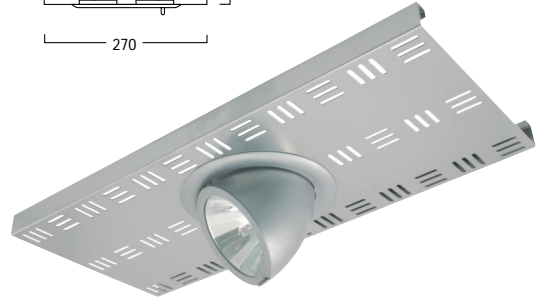


Network Downlighter Modules

Arill Adjustable - 600mm Modules

LV Halogen		LV Halogen TriColor		Metal Halide	
50w LVR	GX53	3x 50w LVH	GX5.3	20w MHC	G8.5
100w LVR	GX53			35w MHC	G8.5
NW892 N	LVR050	NW892 M	LVH050	70w MHC	G8.5
NW892 M	LVR100			35w MHR	GX8.5
		NW892 Q	MHC020	70w MHR	GX8.5
		NW892 Q	MHC035		
		NW892 Q	MHC070		
		NW892 Q	MHR035		
		NW892 Q	MHR070		



L Modules


LV Halogen		LV Halogen TriColor		Metal Halide	
50w LVR	GX53	3x 50w LVH	GX5.3	20w MHC	G8.5
100w LVR	GX53			35w MHC	G8.5
NW151 N	LVR050	NW151 M	LVH050	70w MHC	G8.5
NW151 M	LVR100			35w MHR	GX8.5
		NW151 Q	MHC020	70w MHR	GX8.5
		NW151 Q	MHC035		
		NW151 Q	MHC070		
		NW151 Q	MHR035		
		NW151 Q	MHR070		

T Modules

LV Halogen		LV Halogen TriColor		Metal Halide	
50w LVR	GX53	3x 50w LVH	GX5.3	20w MHC	G8.5
100w LVR	GX53			35w MHC	G8.5
NW152 N	LVR050	NW152 M	LVH050	70w MHC	G8.5
NW152 M	LVR100			35w MHR	GX8.5
		NW152 Q	MHC020	70w MHR	GX8.5
		NW152 Q	MHC035		
		NW152 Q	MHC070		
		NW152 Q	MHR035		
		NW152 Q	MHR070		

X Modules


LV Halogen		LV Halogen TriColor		Metal Halide	
50w LVR	GX53	3x 50w LVH	GX5.3	20w MHC	G8.5
100w LVR	GX53			35w MHC	G8.5
NW153 N	LVR050	NW153 M	LVH050	70w MHC	G8.5
NW153 M	LVR100			35w MHR	GX8.5
		NW153 Q	MHC020	70w MHR	GX8.5
		NW153 Q	MHC035		
		NW153 Q	MHC070		
		NW153 Q	MHR035		
		NW153 Q	MHR070		

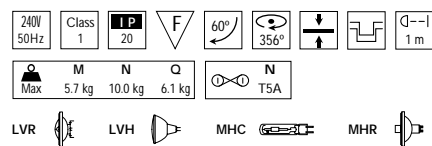


- M** Electronic dimmable transformer (LVR)
- N** Electronic dimmable transformer + Emergency (50w LVR)
- Q** Electronic discharge ballast (MHC, MHR)

- 1** - White **3** - Black **6** - Graphite


- +** Reflector
 - 283 Narrow beam angle (MHC) 152
 - 284 Wide beam angle (MHC) 154
 - 268 Anti glare baffle (MHC)
- Glass**
 - 213 3x Red (LVH)
 - 214 3x Green (LVH)
 - 215 3x Blue (LVH)
 - 216 1x Red, 1x Green, 1x Blue (LVH)
- +** Food enhancement filters (p373) (MHC)




Module

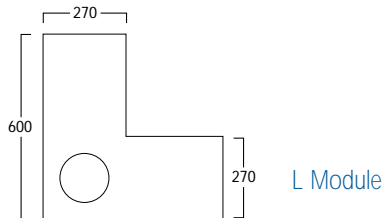

L Module

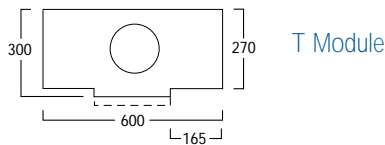

T Module

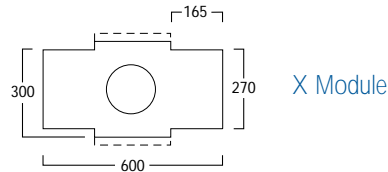

X Module

Current and Power Ratings

Lamp	Watts (W)	Line 1 (A)
1x 50W	55.0	0.22
1x 100W	107.0	0.44

Lamp	Watts (W)	Line 1 (A)
1x 20W	23.8	0.10
1x 35W	44.5	0.20
1x 70W	79.5	0.36

Recommended Lamps

Type	Osram	Philips
LVR050	M161	426550
LVR100	M152	427069

Type	Osram	Philips
LVH050	M258T	425164

Type	Osram	Philips	GE
MHC020	-	-	CMH20
MHC035	HC35CW	200006	CMH35
MHC070	HC70CW	201676	CMH70

Type	Osram	Philips
MHR035	-	204523
MHR070	-	207234





Glass

- 005 Flush clear
- 006 Flush dots
- 007 Flush etched
- 008 Flush ring
- 013 Floating etched
- 014 Floating etched inner
- 015 Floating etched outer
- 017 Halo blue
- 018 Halo etched
- 020 Cone blue
- 021 Cone etched
- 292 Recessed prismatic




Reflector

























- 023 Wallwasher
- 024 Square louvre
- 025 Turbo louvre
- 027 Cross blade louvre
- 291 Diamond facet



268 Anti glare baffle



Medium beam supplied as standard

	12V
	Voltage & frequency
	Class 1 / II / III
	Ingress protection
	Suitable for flammable surface
	Plug & socket connections
	Fused terminal block
	Integral fuse
	Knock out size
	Tilt
	Rotation / pan
	Cut out
	Fixing centres
	Uplighting / Downlighting
	Uplighting / Downlighting
	Pressed metal construction
	Extruded aluminium construction
	Spun construction
	Die cast construction
	Minimum distance from lamp
	Decorative glass feature
	Safety glass
	Foot switch
	Supplied complete with plug
	Maximum weight kg
	Operating temperature of fascia
	Tamper proof screws
	Maximum evenly distributed load kg