




## Elito 056

☀ ☺ ☀ ■ ⦿  
**LV Halogen**  
**Surface**  
 100w LVR G53 **IS056 M LVR100** -

240V 50Hz Class I IP 20 F 170° 330° 67 x 35 mm 50mm

1 m 1.0 kg

LVR



### LED integrated



For LED version of the Elito 056 please see page 39 of the 'Evolution' catalogue.

- M Electronic dimmable transformer
- Q Electronic discharge ballast
- ⦿ 1 - White 3 - Black 6 - Graphite
- + **Reflector**
- 283 Narrow beam (MHC) 152
- 284 Wide beam (MHC) 154


#### Current and Power Ratings

LVR Lamp	□ M Current (A)	Power (W)
1x 100WV	0.46	111.0

#### Recommended Lamps

Type	Osram	Philips
LVR100	M152	427069

## Product Codes Explained

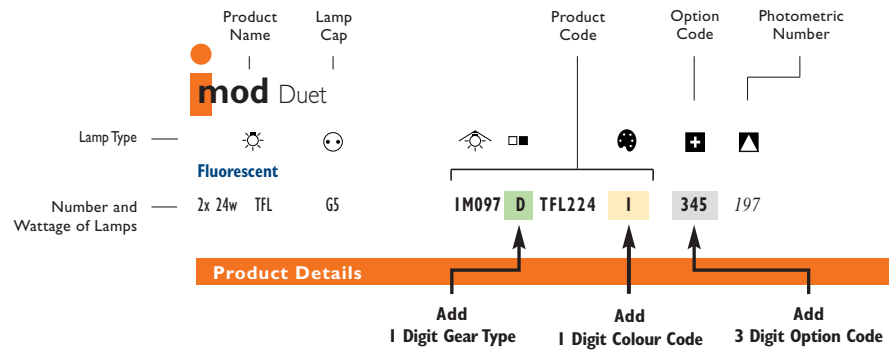

## Symbols

	12V
	Voltage & frequency
	Class I / II / III
	Ingress protection
	Suitable for flammable surface
	Plug & socket connections
	Unfused terminal block
	Fused terminal block
	Integral fuse
	Knockout size
	Tilt
	Rotation / pan
	Cut out
	Fixing centres
	<b>Uplighting</b> / Downlighting
	Uplighting / <b>Downlighting</b>
	Pressed metal construction
	Extruded aluminium construction
	Spun construction
	Die cast construction
	Injection moulding
	Minimum distance from lamp
	Decorative glass feature
	Safety glass
	Foot switch
	Supplied complete with plug
	Maximum weight kg
	Operating temperature of fascia
	Tamper proof screws
	Maximum evenly distributed load kg