





Opus


Metal Halide						
Surface						
20w	MHC	G8.5	IS897	Q	MHC020	+ 183
35w	MHC	G8.5	IS897	Q	MHC035	+ 183
70w	MHC	G8.5	IS897	Q	MHC070	+ 183
Single Circuit Track						
20w	MHC	G8.5	TS897	Q	MHC020	+ 183
35w	MHC	G8.5	TS897	Q	MHC035	+ 183
70w	MHC	G8.5	TS897	Q	MHC070	+ 183
Three Circuit Track						
20w	MHC	G8.5	TT897	Q	MHC020	+ 183
35w	MHC	G8.5	TT897	Q	MHC035	+ 183
70w	MHC	G8.5	TT897	Q	MHC070	+ 183

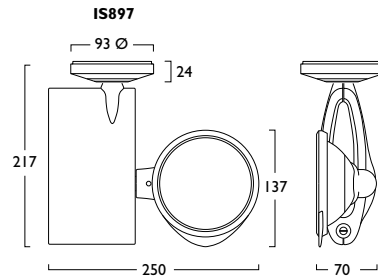

MHC



Medium beam supplied as standard



289 Anti glare baffle

	Q	Electronic discharge ballast
	1 - White 3 - Black 6 - Graphite	
	Reflector	
287	Narrow beam angle (MHC)	140
288	Wide beam angle (MHC)	143
289	Anti glare baffle	

Current and Power Ratings

MHC	□	Q
Lamp	Current (A)	Power (W)
1x 20W	0.10	23.8
1x 35W	0.22	44.5
1x 70W	0.36	79.0

Recommended Lamps

Type	Osram	Philips
MHC020	PB20TCW	---
MHC035	PB35TCW	202277
MHC070	PB70TCW	201676

Product Codes Explained



Symbols

	12V
	Voltage & frequency
	Class I / II / III
	Ingress protection
	Suitable for flammable surface
	Plug & socket connections
	Unfused terminal block
	Fused terminal block
	Integral fuse
	Knockout size
	Tilt
	Rotation / pan
	Cut out
	Fixing centres
	Uplighting / Downlighting
	Uplighting / Downlighting
	Pressed metal construction
	Extruded aluminium construction
	Spun construction
	Die cast construction
	Injection moulding
	Minimum distance from lamp
	Decorative glass feature
	Safety glass
	Foot switch
	Supplied complete with plug
	Maximum weight kg
	Operating temperature of fascia
	Tamper proof screws
	Maximum evenly distributed load kg