


Pageant

LV Halogen									
Surface									
100w	LVR	G53	IS927	M	LVR100	-			
100w	LVC	GY6.35	IS927	M	LVC100	-	+	173	
Single Circuit Track									
100w	LVR	G53	TS927	M	LVR100	-			
100w	LVC	GY6.35	TS927	M	LVC100	-	+	173	
Three Circuit Track									
100w	LVR	G53	TT927	M	LVR100	-			
100w	LVC	GY6.35	TT927	M	LVC100	-	+	173	

Metal Halide									
Surface									
35w	MHR	GX8.5	IS927	Q	MHR035	-			
70w	MHR	GX8.5	IS927	Q	MHR070	-			
20w	MHC	G8.5	IS927	Q	MHC020	-	+	153	
35w	MHC	G8.5	IS927	Q	MHC035	-	+	153	
70w	MHC	G8.5	IS927	Q	MHC070	-	+	153	
Single Circuit Track									
35w	MHR	GX8.5	TS927	Q	MHR035	-			
70w	MHR	GX8.5	TS927	Q	MHR070	-			
20w	MHC	G8.5	TS927	Q	MHC020	-	+	153	
35w	MHC	G8.5	TS927	Q	MHC035	-	+	153	
70w	MHC	G8.5	TS927	Q	MHC070	-	+	153	
Three Circuit Track									
35w	MHR	GX8.5	TT927	Q	MHR035	-			
70w	MHR	GX8.5	TT927	Q	MHR070	-			
20w	MHC	G8.5	TT927	Q	MHC020	-	+	153	
35w	MHC	G8.5	TT927	Q	MHC035	-	+	153	
70w	MHC	G8.5	TT927	Q	MHC070	-	+	153	

- Electronic dimmable transformer
- M** Electronic discharge ballast
- Q** Electronic discharge ballast
- 1 - White 3 - Black 6 - Graphite
- +** Reflector
 - 283** Narrow beam angle (MHC) 152
 - 284** Wide beam angle (MHC) 154
 - 285** Narrow beam angle (LVC) 172
 - 286** Wide beam angle (LVC) 174
 - 268** Anti glare baffle (LVC, MHC)

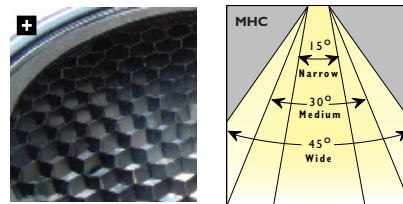

268 Anti glare baffle

Medium beam supplied as standard

Current and Power Ratings

LVR	<input type="checkbox"/> <input type="checkbox"/> M		
Lamp	Current (A)	Power (W)	
1x 100W	0.46	111.0	

LVC	<input type="checkbox"/> <input type="checkbox"/> M		
Lamp	Current (A)	Power (W)	
1x 100W	0.46	111.0	

MHR	<input type="checkbox"/> <input type="checkbox"/> Q		
Lamp	Current (A)	Power (W)	
1x 35W	0.22	44.5	
1x 70W	0.36	79.0	

MHC	<input type="checkbox"/> <input type="checkbox"/> Q		
Lamp	Current (A)	Power (W)	
1x 20W	0.10	23.8	
1x 35W	0.22	44.5	
1x 70W	0.36	79.0	


Recommended Lamps

Type	Osram	Philips
LVR100	M152	427069

Type	Osram	Philips
LVC100	---	402158

Type	Osram	Philips
MHR035	---	204523
MHR070	---	207234

Type	Osram	Philips
MHC020	PB20TCW	---
MHC035	PB35TCW	202277
MHC070	PB70TCW	201676

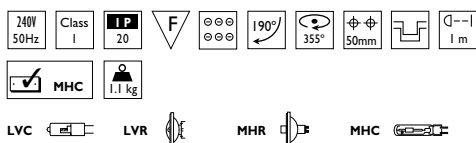

Product Codes Explained



Symbols

	12V
	Voltage & frequency
	Class I / II / III
	Ingress protection
	Suitable for flammable surface
	Plug & socket connections
	Unfused terminal block
	Fused terminal block
	Integral fuse
	Knockout size
	Tilt
	Rotation / pan
	Cut out
	Fixing centres
	Uplighting / Downlighting
	Uplighting / Downlighting
	Pressed metal construction
	Extruded aluminium construction
	Spun construction
	Die cast construction
	Injection moulding
	Minimum distance from lamp
	Decorative glass feature
	Safety glass
	Foot switch
	Supplied complete with plug
	Maximum weight kg
	Operating temperature of fascia
	Tamper proof screws
	Maximum evenly distributed load kg