




Yega 536


LV Halogen

Surface	Power	Ballast	Transformer	IS536	M	LVR100	Color	+
100w	LVR	G53		IS536	M	LVR100	-	+
Single Circuit Track								
100w	LVR	G53		TS536	M	LVR100	-	+
Three Circuit Track								
100w	LVR	G53		TT536	M	LVR100	-	+

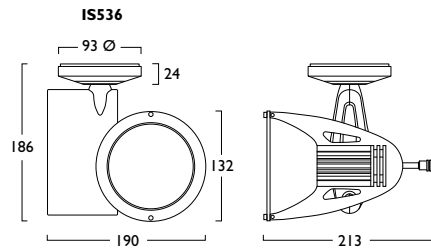

Metal Halide

Surface	Power	Ballast	Transformer	IS536	Q	MHR035	Color	+
35w	MHR	GX8.5		IS536	Q	MHR035	-	+
70w	MHR	GX8.5		IS536	Q	MHR070	-	+
Single Circuit Track								
35w	MHR	GX8.5		TS536	Q	MHR035	-	+
70w	MHR	GX8.5		TS536	Q	MHR070	-	+
Three Circuit Track								
35w	MHR	GX8.5		TT536	Q	MHR035	-	+
70w	MHR	GX8.5		TT536	Q	MHR070	-	+



I22 Barn doors (black)



- M Electronic dimmable transformer
- Q Electronic discharge ballast
- 1 - White 3 - Black 6 - Graphite
- + I22 Barn doors (black)

Current and Power Ratings

LVR	M	
Lamp	Current (A)	Power (W)
1x 100W	0.46	111.0

MHR	Q	
Lamp	Current (A)	Power (W)
1x 35W	0.22	44.5
1x 70W	0.36	79.0

Recommended Lamps

Type	Osram	Philips
LVR100	M152	427069

Type	Osram	Philips
MHR035	---	204523
MHR070	---	207234

Product Codes Explained



Symbols

	12V
	Voltage & frequency
	Class I / II / III
	Ingress protection
	Suitable for flammable surface
	Plug & socket connections
	Unfused terminal block
	Fused terminal block
	Integral fuse
	Knockout size
	Tilt
	Rotation / pan
	Cut out
	Fixing centres
	Uplighting / Downlighting
	Uplighting / Downlighting
	Pressed metal construction
	Extruded aluminium construction
	Spun construction
	Die cast construction
	Injection moulding
	Minimum distance from lamp
	Decorative glass feature
	Safety glass
	Foot switch
	Supplied complete with plug
	Maximum weight kg
	Operating temperature of fascia
	Tamper proof screws
	Maximum evenly distributed load kg