



## Yega 896






### LV Halogen

Surface			IS896	M	LVH050	-	+
50w	LVH	GX5.3					
Single Circuit Track			TS896	M	LVH050	-	+
50w	LVH	GX5.3					
Three Circuit Track			TT896	M	LVH050	-	+
50w	LVH	GX5.3					

### Metal Halide

Surface			IS896	Q	MHB020	-	+
20w	MHB	GX10					
35w	MHB	GX10	IS896	Q	MHB035	-	+
Single Circuit Track			TS896	Q	MHB020	-	+
20w	MHB	GX10					
35w	MHB	GX10	TS896	Q	MHB035	-	+
Three Circuit Track			TT896	Q	MHB020	-	+
20w	MHB	GX10					
35w	MHB	GX10	TT896	Q	MHB035	-	+

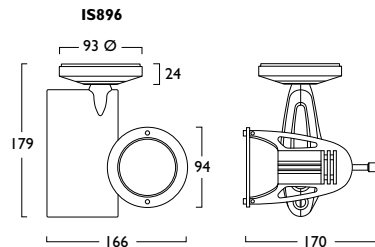

I20 Barn doors (black)

- M Electronic dimmable transformer
- Q Electronic discharge ballast
- 1 - White   3 - Black   6 - Graphite
- + I20 Barn doors (black)

### Current and Power Ratings

LVH	M	
Lamp	Current (A)	Power (W)
1x 50W	0.22	55.0

MHB	Q	
Lamp	Current (A)	Power (W)
1x 20W	0.10	23.8
1x 35W	0.22	44.5

### Recommended Lamps

Type	Osram	Philips
LVH050	M258	425164

Type	SYL	GE
MHB020	---	42691
MHB035	20270	88660

## Product Codes Explained



## Symbols

	12V
	Voltage & frequency
	Class I / II / III
	Ingress protection
	Suitable for flammable surface
	Plug & socket connections
	Unfused terminal block
	Fused terminal block
	Integral fuse
	Knockout size
	Tilt
	Rotation / pan
	Cut out
	Fixing centres
	<b>Uplighting</b> / Downlighting
	Uplighting / <b>Downlighting</b>
	Pressed metal construction
	Extruded aluminium construction
	Spun construction
	Die cast construction
	Injection moulding
	Minimum distance from lamp
	Decorative glass feature
	Safety glass
	Foot switch
	Supplied complete with plug
	Maximum weight kg
	Operating temperature of fascia
	Tamper proof screws
	Maximum evenly distributed load kg