

Concourse


☀️ ☺️ ☀️ ☑️ ⚙️ + ▲
Metal Halide
 70w MHL Rx7s 1D566 - MHL070 - + 016
 150w MHL Rx7s 1D566 - MHL150 - + 016

240V 50Hz Class 1 F 🔩 🔌 200 mm Ø 🔄 1 m ☑️
Max 4.0 kg 1.6 kg B T5A

MHL

- ☑️ Wire wound
- 🟢 Electronic discharge ballast
- ⚙️ 1 - White 3 - Black 6 - Graphite

- + **Reflector** ▲
 118 Narrow beam angle (MHS) 015
 147 LVC Emergency kit (ID561, ID566)




Current and Power Ratings











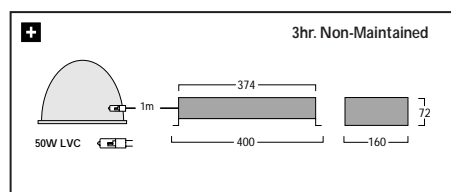

















Lamp	☑️ B			☑️ Q	
	Watts (W)	Line 1 (A)	pfc Cap	Watts (W)	Line 1 (A)
1x 70W	81.5	0.43	12uf	79.5	0.36
1x 150W	168.5	0.80	20uf	162.0	0.70

Recommended Lamps

Type	3000K		4200K	
	Osram	Philips	Osram	Philips
MHL070	H70SW	562685	H70SND	733986
MHL150	H150SW	193506	H15SND	733993



147 LVC Emergency kit

	12V
	Voltage & frequency
	Class 1 / II / III
	Ingress protection
	Suitable for flammable surface
	Plug & socket connections
	Fused terminal block
	Integral fuse
	Knock out size
	Tilt
	Rotation / pan
	Cut out
	Fixing centres
	Uplighting / Downlighting
	Uplighting / Downlighting
	Pressed metal construction
	Extruded aluminium construction
	Spun construction
	Die cast construction
	Minimum distance from lamp
	Decorative glass feature
	Safety glass
	Foot switch
	Supplied complete with plug
	Maximum weight kg
	Operating temperature of fascia
	Tamper proof screws
	Maximum evenly distributed load kg