




Eclipse Adjustable

LV Halogen					
50w	LVH	GXS.3	ID864	M	LVH050
MV Halogen					
50w	MVH	GZ10	ID864	A	MVH050
Metal Halide					
20w	MHB	GX10	ID864	Q	MHB020
35w	MHB	GX10	ID864	Q	MHB035

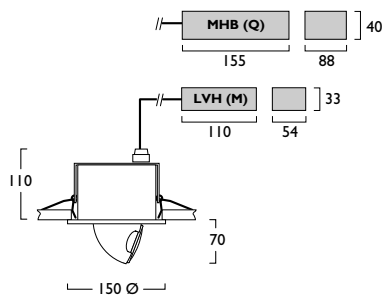

Current and Power Ratings

LVH	M	
Lamp	Current (A)	Power (W)
1x 50W	0.22	55.0

MVH	A	
Lamp	Current (A)	Power (W)
1x 50W	0.22	50.0

MHB	Q	
Lamp	Current (A)	Power (W)
1x 20W	0.10	23.8
1x 35W	0.22	44.5

Recommended Lamps


LVH	Osram	Philips
LVH050	M258	425164

MVH	Osram	Philips
MVH050	P165FD	649539
	35 deg	50 deg

MHB	SYL	GE
MHB020	---	42691
MHB035	20270	88660

- No control gear 240V (MVH)
 - Electronic dimmable transformer (LVH)
 - Electronic discharge ballast (MHB)
- 1 - White 3 - Black 6 - Graphite

Product Codes Explained

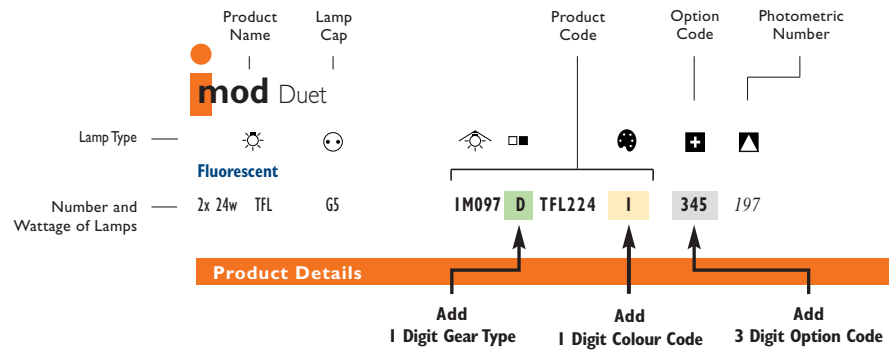

Symbols

	12V
	Voltage & frequency
	Class I / II / III
	Ingress protection
	Suitable for flammable surface
	Plug & socket connections
	Unfused terminal block
	Fused terminal block
	Integral fuse
	Knockout size
	Tilt
	Rotation / pan
	Cut out
	Fixing centres
	Uplighting / Downlighting
	Uplighting / Downlighting
	Pressed metal construction
	Extruded aluminium construction
	Spun construction
	Die cast construction
	Injection moulding
	Minimum distance from lamp
	Decorative glass feature
	Safety glass
	Foot switch
	Supplied complete with plug
	Maximum weight kg
	Operating temperature of fascia
	Tamper proof screws
	Maximum evenly distributed load kg