



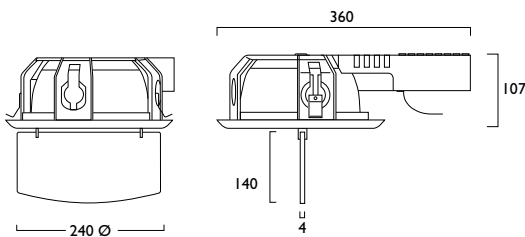

## Solara Info


**Fluorescent**

18w	PLC	G24q-2	<b>ID863</b>	<b>E</b>	<b>PLC018</b>	-	+	126
26w	PLC	G24q-3	<b>ID863</b>	<b>E</b>	<b>PLC026</b>	-	+	126
32w	PLT	GX24q-3	<b>ID863</b>	<b>E</b>	<b>PLT032</b>	-	+	126
42w	PLT	GX24q-4	<b>ID863</b>	<b>E</b>	<b>PLT042</b>	-	+	126
2x 18w	PLC	G24q-2	<b>ID863</b>	<b>E</b>	<b>PLC218</b>	-	+	032
2x 26w	PLC	G24q-3	<b>ID863</b>	<b>E</b>	<b>PLC226</b>	-	+	034




Maximum ceiling thickness 25mm


- High frequency + Emergency
- 1 - White 3 - Black 4 - Chrome 6 - Graphite
- Glass**
- 028** Emergency - Left/Right
- 029** Emergency - Down
- 030** Emergency - Door



028 Emergency - Left/Right



029 Emergency - Down



030 Emergency - Door

The **Solara Info** has all the features of the Solara Slim with the addition of high quality screen printed, tempered glass signage.

### Current and Power Ratings

PLC	□ ■	
Lamp	Current (A)	Power (W)
1x 18W	0.09	19.5
1x 26W	0.13	26.5
2x 18W	0.20	37.5
2x 26W	0.20	51.0


PLT	□ ■	
Lamp	Current (A)	Power (W)
1x 32W	0.16	34.5
1x 42W	0.21	46.0

### Recommended Lamps

PLC	3000K		4000K	
	Type	Osram	Philips	Osram
PLC018	DDE183	623331	DDE184	623348
PLC026	DDE163	623355	DDE264	623362

PLT	3000K		4000K	
	Type	Osram	Philips	Osram
PLT032	DTE323	611284	DTE324	611314
PLT042	DTE423	611345	DTE424	611376

## Product Codes Explained

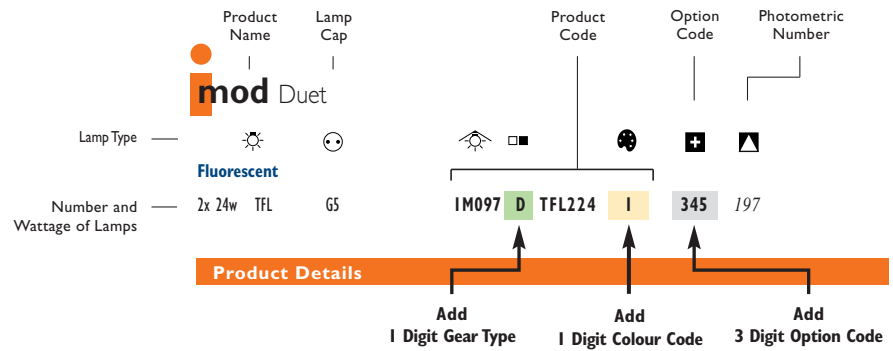

## Symbols

	12V
	Voltage & frequency
	Class I / II / III
	Ingress protection
	Suitable for flammable surface
	Plug & socket connections
	Unfused terminal block
	Fused terminal block
	Integral fuse
	Knockout size
	Tilt
	Rotation / pan
	Cut out
	Fixing centres
	<b>Uplighting</b> / Downlighting
	Uplighting / <b>Downlighting</b>
	Pressed metal construction
	Extruded aluminium construction
	Spun construction
	Die cast construction
	Injection moulding
	Minimum distance from lamp
	Decorative glass feature
	Safety glass
	Foot switch
	Supplied complete with plug
	Maximum weight kg
	Operating temperature of fascia
	Tamper proof screws
	Maximum evenly distributed load kg