




## Solara Maximus

<b>Fluorescent</b>								
57w	PLT	GX24q-5	<b>ID635</b>	—	<b>PLT057</b>	—	+	190
2x 32w	PLT	GX24q-3	<b>ID635</b>	—	<b>PLT232</b>	—	+	053
2x 42w	PLT	GX24q-4	<b>ID635</b>	—	<b>PLT242</b>	—	+	053

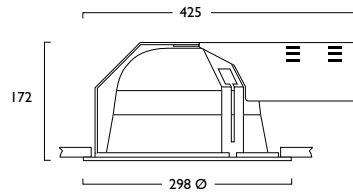

0.5 m
 2.9 kg

PLT

**Gear types F, G & V must be operated through a Digital Serial Interface (p389)**

- D** High frequency
- E** High frequency + Emergency
- Z** High frequency + self test Emergency
- F** High frequency digital dimming
- G** High frequency digital dimming + Emergency
- V** High frequency digital dimming + self test Emergency
- H** High frequency analogue (1-10V) dimming
- I** High frequency analogue (1-10V) dimming + Emergency
- W** High frequency analogue (1-10V) dimming + self test Emergency
- J** High frequency switch dimming
- K** High frequency switch dimming + Emergency
- Y** High frequency switch dimming + self test Emergency
- S** High frequency DALI dimming
- T** High frequency DALI dimming + Emergency
- U** High frequency DALI dimming + self test Emergency
- C** High frequency DALI dimming + DALI Emergency

**I** - White **3** - Black **6** - Graphite

- Glass**
- 048** Flush clear } IP44
  - 049** Flush etched }
  - 145** Flush clear + gasket } IP64
  - 146** Flush etched + gasket }
  - 051** Halo blue
  - 052** Halo etched
  - 054** Cone blue
  - 055** Cone etched
  - 354** Recessed Prismatic } 2x

- Reflector**
- 057** Wallwasher
  - 058** Square louvre
  - 059** Turbo louvre
  - 060** Cross blade louvre

### Current and Power Ratings

Lamp	Current (A)	Power (W)
1x 57W	0.28	60.5
2x 32W	0.31	68.0
2x 42W	0.41	89.0

### Recommended Lamps

Type	3000K		4000K	
	Osram	Philips	Osram	Philips
PLT032	DTE323	611284	DTE324	611314
PLT042	DTE423	611345	DTE424	611376
PLT057	GE 45204	611406	GE 45201	611451



## Solara Maximus

### Glass Options +



**048** Flush clear (IP44)  
**145** Flush clear + gasket (IP65)



**049** Flush etched (IP44)  
**146** Flush etched + gasket (IP65)



**051** Halo blue



**052** Halo etched



**054** Cone blue



**055** Cone etched



**354** Recessed Prismatic

### Reflector Options +



**057** Wallwasher



**058** Square louvre




**059** Turbo louvre



**060** Cross blade louvre

## Product Codes Explained

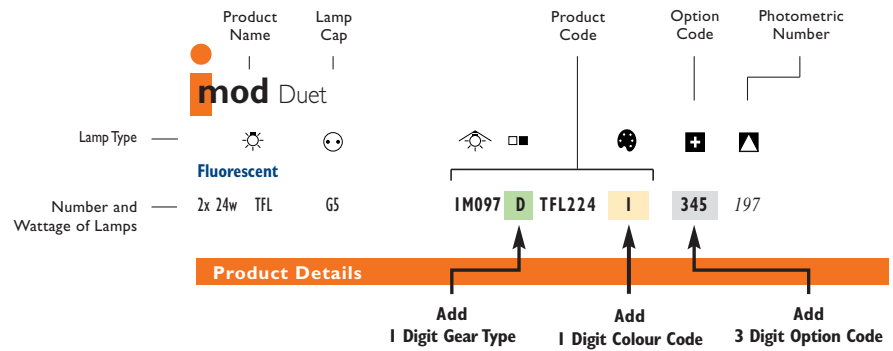

## Symbols

	12V
	Voltage & frequency
	Class I / II / III
	Ingress protection
	Suitable for flammable surface
	Plug & socket connections
	Unfused terminal block
	Fused terminal block
	Integral fuse
	Knockout size
	Tilt
	Rotation / pan
	Cut out
	Fixing centres
	<b>Uplighting</b> / Downlighting
	Uplighting / <b>Downlighting</b>
	Pressed metal construction
	Extruded aluminium construction
	Spun construction
	Die cast construction
	Injection moulding
	Minimum distance from lamp
	Decorative glass feature
	Safety glass
	Foot switch
	Supplied complete with plug
	Maximum weight kg
	Operating temperature of fascia
	Tamper proof screws
	Maximum evenly distributed load kg