



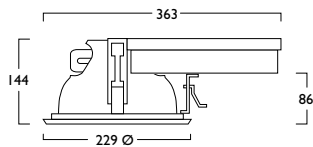

Solara Performer

Fluorescent

18w	PLC	G24q-2	ID724	PLC018	077
26w	PLC	G24q-3	ID724	PLC026	077
32w	PLT	GX24q-3	ID724	PLT032	077
42w	PLT	GX24q-4	ID724	PLT042	077
2x 18w	PLC	G24q-2	ID724	PLC218	075
2x 26w	PLC	G24q-3	ID724	PLC226	076

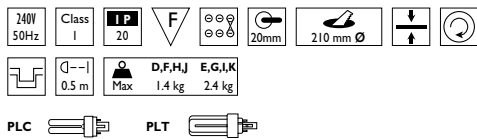

■ **Gear types F, G & V must be operated through a Digital Serial Interface (p389)**

- D** High frequency
- E** High frequency + Emergency
- Z** High frequency + self test Emergency
- F** High frequency digital dimming
- G** High frequency digital dimming + Emergency
- V** High frequency digital dimming + self test Emergency
- H** High frequency analogue (1-10V) dimming
- I** High frequency analogue (1-10V) dimming + Emergency
- W** High frequency analogue (1-10V) dimming + self test Emergency
- J** High frequency switch dimming
- K** High frequency switch dimming + Emergency
- Y** High frequency switch dimming + self test Emergency
- S** High frequency DALI dimming
- T** High frequency DALI dimming + Emergency
- U** High frequency DALI dimming + self test Emergency
- C** High frequency DALI dimming + DALI Emergency

1 - White **3** - Black **6** - Graphite

Current and Power Ratings

PLC	Current (A)	Power (W)
1x 18W	0.09	19.5
1x 26W	0.13	26.5
2x 18W	0.20	37.5
2x 26W	0.20	51.0

PLT	Current (A)	Power (W)
1x 32W	0.16	34.5
1x 42W	0.21	46.0

Recommended Lamps

PLC	3000K		4000K	
	Osram	Philips	Osram	Philips
PLC018	DDE183	623331	DDE184	623348
PLC026	DDE163	623355	DDE264	623362

PLT	3000K		4000K	
	Osram	Philips	Osram	Philips
PLT032	DTE323	611284	DTE324	611314
PLT042	DTE423	611345	DTE424	611376

Product Codes Explained



Symbols

	12V
	Voltage & frequency
	Class I / II / III
	Ingress protection
	Suitable for flammable surface
	Plug & socket connections
	Unfused terminal block
	Fused terminal block
	Integral fuse
	Knockout size
	Tilt
	Rotation / pan
	Cut out
	Fixing centres
	Uplighting / Downlighting
	Uplighting / Downlighting
	Pressed metal construction
	Extruded aluminium construction
	Spun construction
	Die cast construction
	Injection moulding
	Minimum distance from lamp
	Decorative glass feature
	Safety glass
	Foot switch
	Supplied complete with plug
	Maximum weight kg
	Operating temperature of fascia
	Tamper proof screws
	Maximum evenly distributed load kg