





## Solara Slim

<b>Fluorescent</b>								
18w	PLC	G24q-2	<b>ID943</b>	—	<b>PLC018</b>	—	+	126
26w	PLC	G24q-3	<b>ID943</b>	—	<b>PLC026</b>	—	+	126
32w	PLT	GX24q-3	<b>ID943</b>	—	<b>PLT032</b>	—	+	126
42w	PLT	GX24q-4	<b>ID943</b>	—	<b>PLT042</b>	—	+	126
2x 18w	PLC	G24q-2	<b>ID943</b>	—	<b>PLC218</b>	—	+	032
2x 26w	PLC	G24q-3	<b>ID943</b>	—	<b>PLC226</b>	—	+	034

240V 50Hz	Class II	IP 20	F					
0.5m	Max	D, F, H, J	E, G, I, K	PLC		PLT		



### LED Integrated



For LED version of the Solara Slim please see page 40 of the 'Evolution' catalogue.

### Current and Power Ratings

PLC Lamp	Current (A)	Power (W)
1x 18W	0.09	19.5
1x 26W	0.13	26.5
2x 18W	0.20	37.5
2x 26W	0.20	51.0

PLT Lamp	Current (A)	Power (W)
1x 32W	0.16	34.5
1x 42W	0.21	46.0

### Recommended Lamps

PLC Type	3000K		4000K	
	Osram	Philips	Osram	Philips
PLC018	DDE183	623331	DDE184	623348
PLC026	DDE163	623355	DDE264	623362


PLT Type	3000K		4000K	
	Osram	Philips	Osram	Philips
PLT032	DTE323	611284	DTE324	611314
PLT042	DTE423	611345	DTE424	611376

### Gear types F, G & V must be operated through a Digital Serial Interface (p389)

- D** High frequency
- E** High frequency + Emergency
- Z** High frequency + self test Emergency
- F** High frequency digital dimming
- G** High frequency digital dimming + Emergency
- V** High frequency digital dimming + self test Emergency
- H** High frequency analogue (1-10V) dimming
- I** High frequency analogue (1-10V) dimming + Emergency
- W** High frequency analogue (1-10V) dimming + self test Emergency
- J** High frequency switch dimming
- K** High frequency switch dimming + Emergency
- Y** High frequency switch dimming + self test Emergency
- S** High frequency DALI dimming
- T** High frequency DALI dimming + Emergency
- U** High frequency DALI dimming + self test Emergency
- C** High frequency DALI dimming + DALI Emergency

**I** - White **3** - Black **4** - Chrome **6** - Graphite

- +** **Glass**
- 005** Flush clear
- 006** Flush dots
- 007** Flush etched
- 008** Flush ring
- 009** Flush clear + gasket
- 010** Flush dots + gasket
- 011** Flush etched + gasket
- 012** Flush ring + gasket
- 013** Floating etched
- 014** Floating etched inner
- 017** Halo blue
- 018** Halo etched
- 020** Cone blue
- 021** Cone etched
- 292** Recessed prismatic
- Reflector**
- 023** Wallwasher
- 024** Square louvre
- 025** Turbo louvre
- 027** Cross blade louvre
- 291** Diamond facet
- Fluorescent Halo**
- 360** Flush neptune blue
- 361** Flush lava orange
- 362** Flush acid green
- 363** Flush mars red
- 364** Floating neptune blue
- 365** Floating lava orange
- 366** Floating acid green
- 367** Floating mars red
- Polycarbonate**
- 293** Impact resistant cover (tamperproof/anti-ligature)
- 155** Tamperproof screwdriver

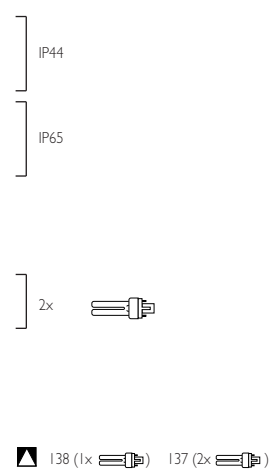



## Solara Slim

### Glass Options +



**005** Flush clear (IP44)  
**009** Flush clear + gasket (IP65)



**006** Flush dots (IP44)  
**010** Flush dots + gasket (IP65)




**007** Flush etched (IP44)  
**011** Flush etched + gasket (IP65)



**008** Flush ring (IP44)  
**012** Flush ring + gasket (IP65)



**013** Floating etched



**014** Floating etched inner



**017** Halo blue



**018** Halo etched




**020** Cone blue




**021** Cone etched



**292** Recessed prismatic



**006** Flush dots (IP44)  
**010** Flush dots + gasket (IP65)



**008** Flush ring (IP44)  
**012** Flush ring + gasket (IP65)



**292** Recessed prismatic

### Reflector Options +



**023** Wallwasher



**024** Square louvre




**025** Turbo louvre



**027** Cross blade louvre



**291** Diamond facet




**291** Diamond facet



## Solara Slim

The Fluorescent Halo options shown below are available in four invigorating and distinctive colours and create a striking 'neon' edge effect for visual impact whilst still producing white light for general ambient lighting. The Impact Resistant Cover (option 293) is supplied with tamperproof screws to provide an anti-ligature luminaire suitable for use in healthcare environments. The Impact Resistant Cover requires a tamperproof screwdriver (option 155).


### Fluorescent Halo Options +



360 Flush neptune blue




361 Flush lava orange



362 Flush acid green



363 Flush mars red



364 Floating neptune blue



365 Floating lava orange



366 Floating acid green




367 Floating mars red

### Polycarbonate Option +



293 Impact resistant cover  
(tamperproof/anti-ligature)

## Product Codes Explained

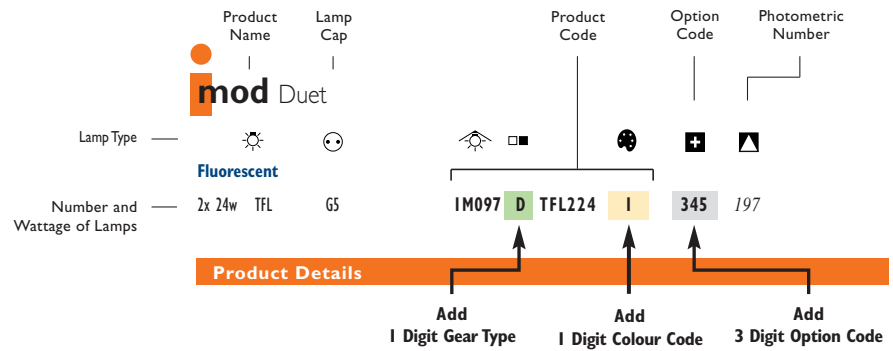

## Symbols

	12V
	Voltage & frequency
	Class I / II / III
	Ingress protection
	Suitable for flammable surface
	Plug & socket connections
	Unfused terminal block
	Fused terminal block
	Integral fuse
	Knockout size
	Tilt
	Rotation / pan
	Cut out
	Fixing centres
	<b>Uplighting</b> / Downlighting
	Uplighting / <b>Downlighting</b>
	Pressed metal construction
	Extruded aluminium construction
	Spun construction
	Die cast construction
	Injection moulding
	Minimum distance from lamp
	Decorative glass feature
	Safety glass
	Foot switch
	Supplied complete with plug
	Maximum weight kg
	Operating temperature of fascia
	Tamper proof screws
	Maximum evenly distributed load kg