


Linaj Link



Left Link

Fluorescent

28w	TFL	G5	1200mm	WL947	-	TFL028	-	+	166
54w	TFL	G5	1200mm	WL947	-	TFL054	-	+	166

Centre Link


Fluorescent

28w	TFL	G5	1200mm	WL945	-	TFL028	-	+	166
54w	TFL	G5	1200mm	WL945	-	TFL054	-	+	166

Right Link

Fluorescent

28w	TFL	G5	1200mm	WL946	-	TFL028	-	+	166
54w	TFL	G5	1200mm	WL946	-	TFL054	-	+	166



Current and Power Ratings

TFL	Current (A)	Power (W)
1x 28W	0.15	31.5
1x 54W	0.27	58.0

Recommended Lamps

Type	3000K		4000K		6500K	
	Osram	Philips	Osram	Philips	Osram	Philips
TFL028	FH2883	639462	FH2884	639486	FH2886	710154
TFL054	FQ5483	643162	FQ5484	643186	FQ54865	643919

□ ■ Gear types F & G must be operated through a Digital Serial Interface (p389)

- D High frequency
- E High frequency + Emergency
- F High frequency digital dimming
- G High frequency digital dimming + Emergency
- H High frequency analogue (1-10V) dimming
- I High frequency analogue (1-10V) dimming + Emergency
- J High frequency switch dimming
- K High frequency switch dimming + Emergency
- S High frequency DALI dimming
- T High frequency DALI dimming + Emergency


● 1 - White 3 - Black 6 - Graphite

- Fluorescent Filter
- 275 1x Neptune Blue
- 276 1x Mars Red
- 277 1x Lava Orange
- 278 1x Acid Green




Linaj Link


Fluorescent Options




275 Fluorescent Filter
Neptune Blue



276 Fluorescent Filter
Mars Red



277 Fluorescent Filter
Lava Orange




278 Fluorescent Filter
Acid Green



Fluorescent Filter

- 275** 1x Neptune Blue
- 276** 1x Mars Red
- 277** 1x Lava Orange
- 278** 1x Acid Green

Product Codes Explained

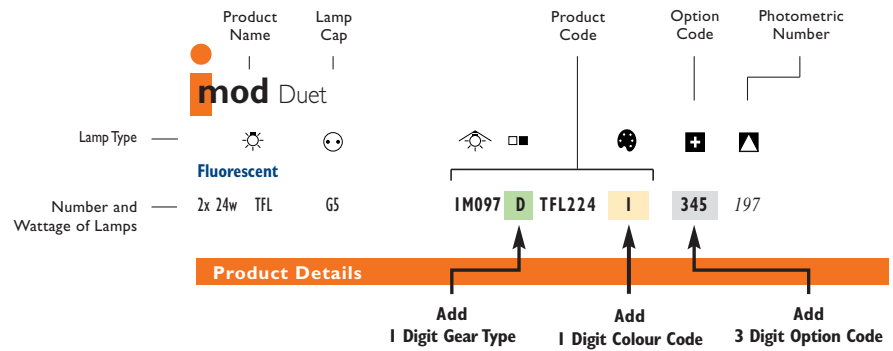

Symbols

	12V
	Voltage & frequency
	Class I / II / III
	Ingress protection
	Suitable for flammable surface
	Plug & socket connections
	Unfused terminal block
	Fused terminal block
	Integral fuse
	Knockout size
	Tilt
	Rotation / pan
	Cut out
	Fixing centres
	Uplighting / Downlighting
	Uplighting / Downlighting
	Pressed metal construction
	Extruded aluminium construction
	Spun construction
	Die cast construction
	Injection moulding
	Minimum distance from lamp
	Decorative glass feature
	Safety glass
	Foot switch
	Supplied complete with plug
	Maximum weight kg
	Operating temperature of fascia
	Tamper proof screws
	Maximum evenly distributed load kg