




WL767 Zebra

Metropolis Safari

Fluorescent

2x 8w	TFL	G5	360mm	Zebra	WL767	-	TFL208	167
2x 8w	TFL	G5	360mm	Tiger	WL715	-	TFL208	167
2x 8w	TFL	G5	360mm	Leopard	WL716	-	TFL208	167

240V 50Hz	Class I	IP 20	F	⊙ ⊙ ⊙ ⊙ ⊙ ⊙	⊕ ⊕ 20mm	⊕ ⊕ 165mm	⚡	⚡
Max	D 3.9 kg	E 5.6 kg						

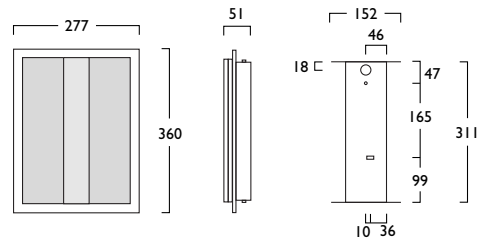

TFL \longleftrightarrow



WL715 Tiger



WL716 Leopard

Current and Power Ratings


Lamp	Current (A)	Power (W)
2x 8W	0.10	19.0

Recommended Lamps

Type	3000K		4000K	
	Osram	Philips	Osram	Philips
TFL008	L8827	704740	L8840	716422

<input type="checkbox"/>	High Frequency
<input type="checkbox"/>	High Frequency + Emergency

Product Codes Explained

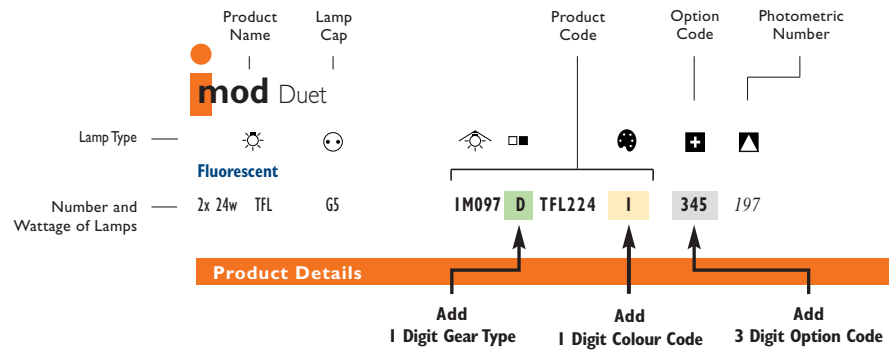

Symbols

	12V
	Voltage & frequency
	Class I / II / III
	Ingress protection
	Suitable for flammable surface
	Plug & socket connections
	Unfused terminal block
	Fused terminal block
	Integral fuse
	Knockout size
	Tilt
	Rotation / pan
	Cut out
	Fixing centres
	Uplighting / Downlighting
	Uplighting / Downlighting
	Pressed metal construction
	Extruded aluminium construction
	Spun construction
	Die cast construction
	Injection moulding
	Minimum distance from lamp
	Decorative glass feature
	Safety glass
	Foot switch
	Supplied complete with plug
	Maximum weight kg
	Operating temperature of fascia
	Tamper proof screws
	Maximum evenly distributed load kg