

Metropolis Sculpt

Fluorescent						
2x 8w	TFL	G5	360mm	WL888	---	TFL208 ---
2x 14w	TFL	G5	600mm	WL889	---	TFL214 ---
2x 24w	TFL	G5	600mm	WL889	---	TFL224 ---

		WL888	WL889	3.5 kg	5.6 kg		

TFL





22 Maple
(Chrome insert detail)



26 Aluminium



28 Neptune

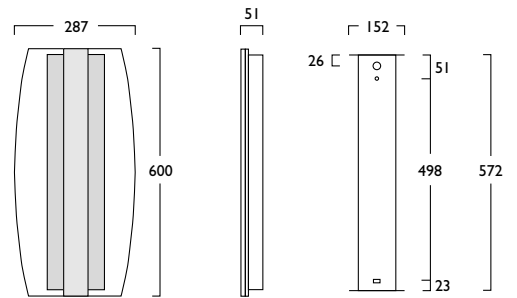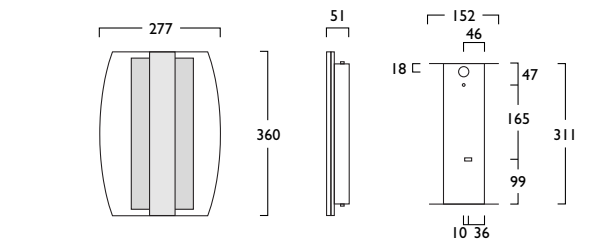

I - □ Square light spill

Gear types F & G must be operated through a Digital Serial Interface (p389)

D	High frequency	} WL889
E	High frequency + Emergency	
F	High frequency digital dimming	
G	High frequency digital dimming + Emergency	
H	High frequency analogue (1-10V) dimming	
I	High frequency analogue (1-10V) dimming + Emergency	
J	High frequency switch dimming	
K	High frequency switch dimming + Emergency	
S	High frequency DALI dimming	
T	High frequency DALI dimming + Emergency	

Fascia 22 - Maple (Chrome insert) 26 - Aluminium 28 - Neptune

Light spill 0 - No light spill I - □ Square light spill

Current and Power Ratings

TFL Lamp	Current (A)	Power (W)
2x 8W	0.10	19.0
2x 14W	0.15	32.0
2x 24W	0.22	51.0

Recommended Lamps

Type	3000K		4000K	
	Osram	Philips	Osram	Philips
TFL008	L8827	704740	L8840	716422
TFL014	FH1483	639387	FH1484	639400
TFL024	FQ2483	639585	FQ2484	639609

Product Codes Explained



Symbols

	12V
	Voltage & frequency
	Class I / II / III
	Ingress protection
	Suitable for flammable surface
	Plug & socket connections
	Unfused terminal block
	Fused terminal block
	Integral fuse
	Knockout size
	Tilt
	Rotation / pan
	Cut out
	Fixing centres
	Uplighting / Downlighting
	Uplighting / Downlighting
	Pressed metal construction
	Extruded aluminium construction
	Spun construction
	Die cast construction
	Injection moulding
	Minimum distance from lamp
	Decorative glass feature
	Safety glass
	Foot switch
	Supplied complete with plug
	Maximum weight kg
	Operating temperature of fascia
	Tamper proof screws
	Maximum evenly distributed load kg